

# BOMAC

エクストラ ワークス エクストラ ストロング

THREE-WHEEL

LITHIUM BATTERY

# FORKLIFT

☆☆☆  
GUARANTEE  
BEST QUALITY  
☆☆☆



RE13TW-SH • RE15TW-SH



After more than 30 years of development, BOMAC has grown into a large company and a world-class forklift exporter and has been widely used in The World.

RE-TW-SH  
SERIES

# UPGRADED PLATFORM

## IMPROVED PERFORMANCE

### NEW PLATFORM

- Lead acid lithium batteries share the same platform, and the parts are highly universal;
- The dashboard cover is upgraded to be more beautiful and durable;
- Delicate and compact appearance, flexible operation
- The truck has excellent trafficability, and the minimum turning radius is only 1.46M.





Lead-acid Platform



Lithium Platform



Minimum Turning Radius as Low as **1.46m**
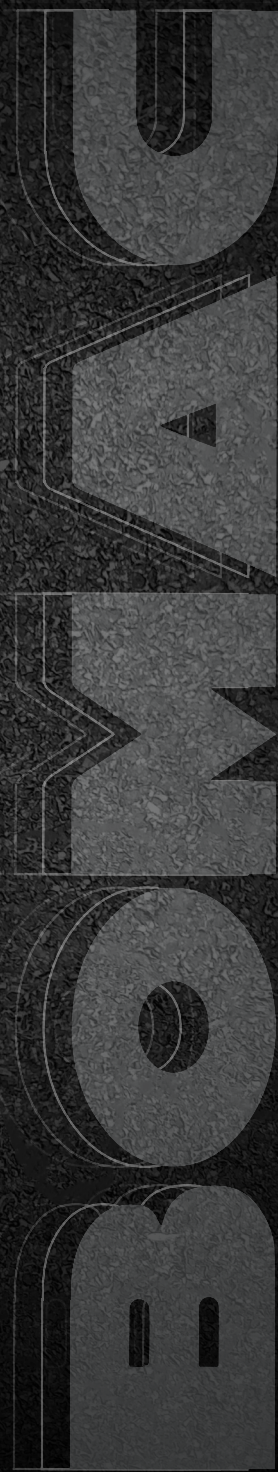
<b>1.3T MAX.</b> Gradeability with load 13%	<b>1.5T MAX.</b> Gradeability with load 11%
--	--




Good bearing capacity at high position



Maximum Lifting Speed With **0.28m/s**



Maximum Lifting Speed Without **0.48m/s**

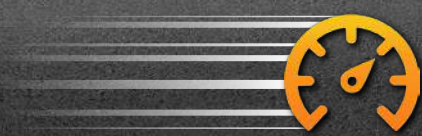


**12-12.5km/h**  
Driving Speed

# SUPER FAST CHARGING

## ACCESSORIES FEATURES

### FAST CHARGING – LONG ENDURANCE

- 48V platform offers higher charging efficiency;
- Realizes faster charging: maximum 456Ah lithium battery has ultra-long endurance;
- The characteristics of high-density energy and quick charging of lithium battery make all day uninterrupted operation of a forklift truck.

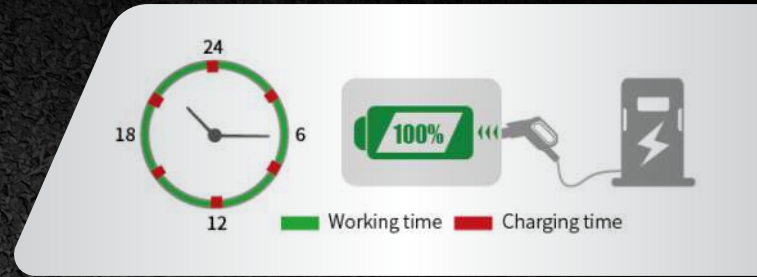

### ACCESSORIES & OPTIMIZED DESIGN

- Two in one integrated dual core electronic control, small size, in line with the new CE standard.
- Maintenance free IP54 AC motor.
- Integrated handheld function color screen instrument and graphical interface design offer simple and intuitive operation.
- Load sensitive hydraulic system reduces system heating which makes operation more accurate and energy saving.
- Ultra low torque steering gear reduces steering operating torque and makes operation easier.



Two in one integrated dual core electronic control




IP54 AC Motor



Color Screen Instrument

#### BOMAC smart fleet management system (Domestic basic edition)

Vehicle positioning	Statistical form
Remote diagnosis	Vehicle management
Remote monitoring	Identification recognition (optional)
Maintenance reminder	Weight management (optional)
Battery management	Collision management (optional)

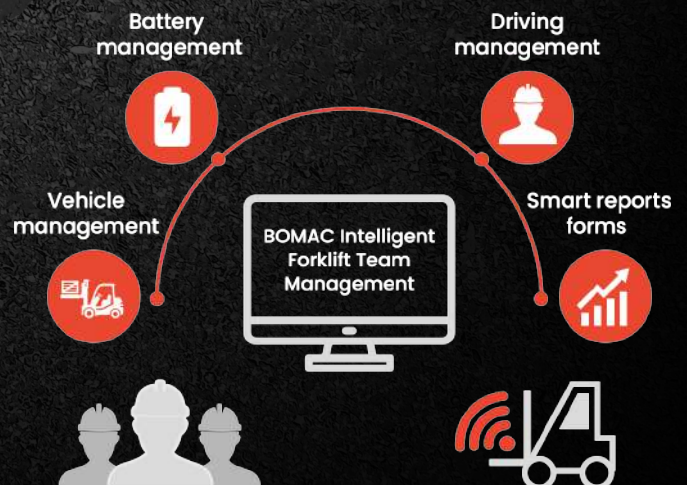

# ERGONOMIC DESIGN

# COMFORTABLE SPACE



Wide View of the Mast  
to Improve Safety Operation



Adjustable Steering Wheel



Right Control Valve Rod

**LED LIGHT**

**REARVIEW MIRROR**

**COMFORTABLE SEAT**

**LARGE FOOT SPACE**



# EASY MAINTENANCE

## EASY PROCEDURE

- Electrical components such as electronic control are centrally and horizontally arranged above the counterweight, with better heat dissipation capacity.
- Open the box cover for maintenance, which is more convenient and hassle-free.
- Integrated electric box is easy to maintain.
- The front bottom plate is of split type, and the accelerator pedal is installed on the frame. The bottom plate is easy for disassembly and overhaul.



Electrical Components






The Front Bottom Plate is Split Type

# INTELLIGENT SECURITY

## AND SAFETY FEATURES


- **Intelligent speed limit in different application:** multi-scenario identification and intelligent speed limit balance efficiency & safety.
- **Intelligent limit buffering:** intelligent induction of mast lifting and lowering avoids extreme impact and is safe and comfortable.
- **Intelligent operation protection:** a full set of OPS system can avoid misoperation and ensure safety.
- **Intelligent control strategy:** dual core controller is in line with the latest EU safety requirements.
- Lithium battery which heats itself automatically at low temperatures has excellent low temperature adaptability.

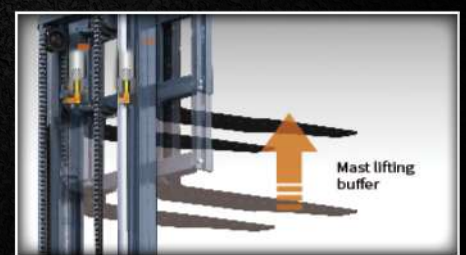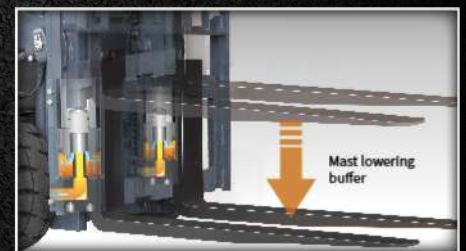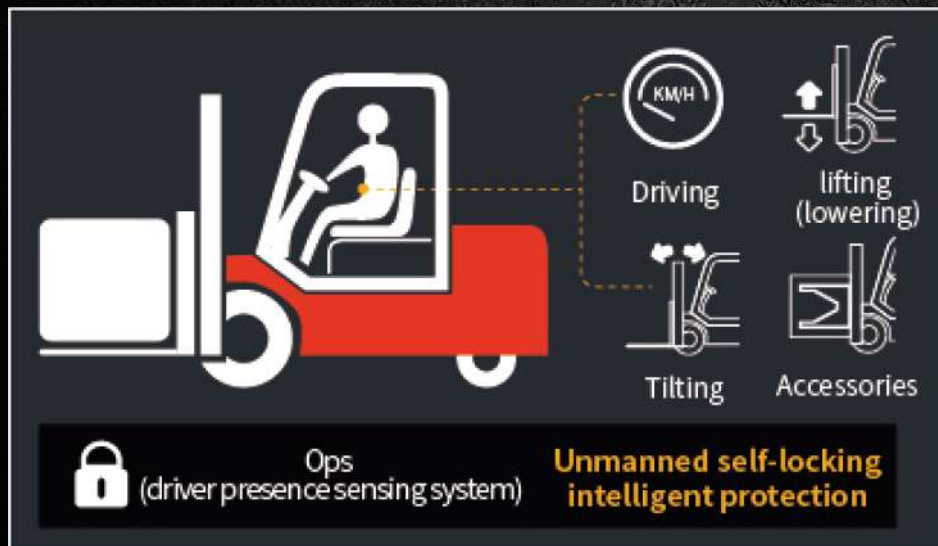



**MANUFACTURER & TECHNICAL DATA**

CHARACTERISTIC						
Manufacturer			<b>BOMAC</b>			
Model			RE13TW-SH		RE15TW-SH	
Configuration number			G2A2	G2LBA2	G2A2	G2LBA2
Rated capacity	Q	kg	1300	1300	1500	1500
Load center distance	c	mm	500			
Power mode			Storage Battery	Lithium Battery	Storage Battery	Lithium Battery
Driving mode			Seated			
Front overhang	x	mm	330 (352*)			
Wheelbase	y	mm	1190			
WEIGHT						
Total weight (with/without battery)		kg	2795/2270	2795/2270	2930/2340	2930/2340
Axle load (laden, front/rear)		kg	3430/680	3430/680	3750/680	3750/680
Axle load (unladen, front/rear)		kg	1205/1605	1205/1605	1170/1760	1170/1760
TYRES						
Tyre size, front			Superelastic Solid Tyre			
Tyre size, rear			18X7-8	18X7-8	18X7-8	18X7-8
Wheels, number front/rear (x=driven wheels)			18X7-8	18X7-8	18X7-8	18X7-8
Tread, front			2/1x	2/1x	2/1x	2/1x
Tread, rear	b <sub>10</sub>	mm	838 (908*)	838 (908*)	838 (908*)	838 (908*)
DIMENSIONS						
Mast tilt angle (forward/backward)	α/β	°	3/6	3/6	3/6	3/6
Height (mast lowered)	h <sub>1</sub>	mm	1955	1955	1955	1955
Free lifting height	h <sub>2</sub>	mm	110	110	110	110
Lifting height (standard)	h <sub>3</sub>	mm	3000	3000	3000	3000
Max. height, extended (with backrest)	h <sub>4</sub>	mm	4008	4008	4008	4008
Height of overhead guard	h <sub>6</sub>	mm	2090	2090	2090	2090
Seat height relating to SIP (to ground)	h <sub>7</sub>	mm	1030	1030	1030	1030
Towing coupling height	h <sub>10</sub>	mm	640	640	640	640
Overall length (with fork)	l <sub>1</sub>	mm	2720 (2742*)	2720 (2742*)	2720 (2742*)	2720 (2742*)
Overall length (without fork)	l <sub>2</sub>	mm	1800 (1822)	1800 (1822)	1800 (1822)	1800 (1822)
Overall width	b <sub>1</sub>	mm	990 (1060*)	990 (1060*)	990 (1060*)	990 (1060*)
Fork size: thickness x width x length			35X100X920	35X100X920	35X100X920	35X100X920
Fork carriage, according to ISO2328	s/e/l	mm	2A	2A	2A	2A
Distance across fork-arms, Max./Min.	b <sub>5</sub>	mm	960/200	960/200	960/200	960/200
Distance across fork-arms, Max./Min.	m <sub>1</sub>	mm	80	80	80	80
Ground clearance (center of wheelbase)	m <sub>2</sub>	mm	95	95	95	95
Right angle stacking aisle width for pallet 1000x1200mm crossways	A <sub>st</sub>	mm	3130 (3150*)	3130 (3150*)	3130 (3150*)	3130 (3150*)
Right angle stacking aisle width for pallet 800x1200mm lengthways	A <sub>st</sub>	mm	3252 (3273*)	3252 (3273*)	3252 (3273*)	3252 (3273*)
Min. outside turning radius	W <sub>a</sub>	mm	1470	1470	1470	1470
PERFORMANCE DATA						
Travel speed (laden/unladen)		km/h	12/12.5	12/12.5	12/12.5	12/12.5
Lift speed (laden/unladen)		mm/s	290/480	290/480	280/480	280/480
Lowering speed (laden/unladen)		mm/s	405/330	405/330	405/330	405/330
Max.drawbar pull (laden/unladen)		N	7400	7400	7400	7400
Max.gradeability (laden/unladen)		%	13/20	13/20	11/18	11/18
Acceleration time(10 m)(laden/unladen)		s	6.1/5.5	6.1/5.5	6.1/5.5	6.1/5.5
BATTERY						
Battery voltage/Capacity		V/Ah	48/315	48/228	48/360	48/228
Battery weight (Min./Max.)		kg	525/635	525/635	590/635	590/635
Battery, according to DIN			43535A	-	43535A	-
MOTOR & CONTROLLER						
Driving motor powering (S2-60min)		kW	6	6	6	6
Lifting motor powering (S3-15%)		kW	8	8	8	8
Driving motor controlling mode			MOSFET/AC			
Lifting motor controlling mode			MOSFET/AC			
ADDITION DATA						
Service brake/Parking brake			Hydraulic/mechanical			
Operating pressure for attachments		Mpa	14.5	14.5	17.5	17.5

**TECHNICAL DRAWING**

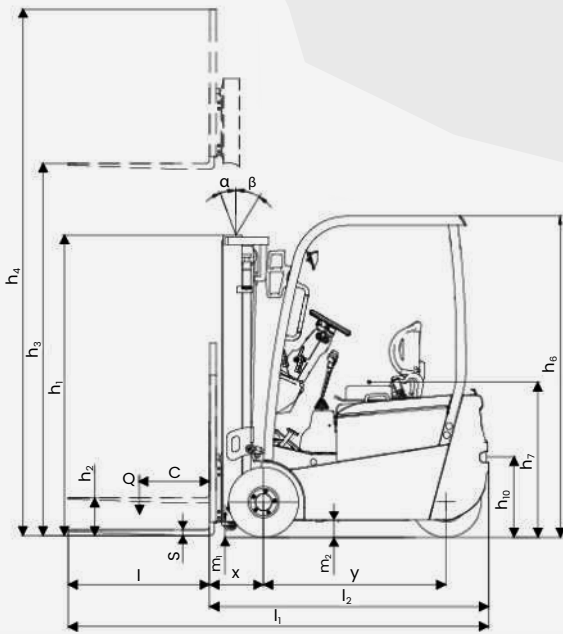

Ast : Right angle stacking aisle  
a : Width  
L<sub>6</sub> : Clearance  
b<sub>12</sub> : Load Length

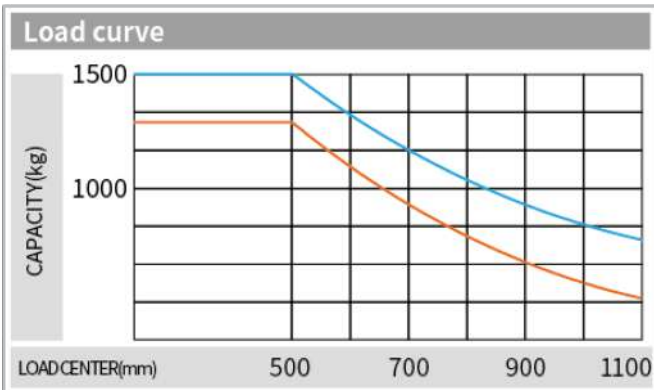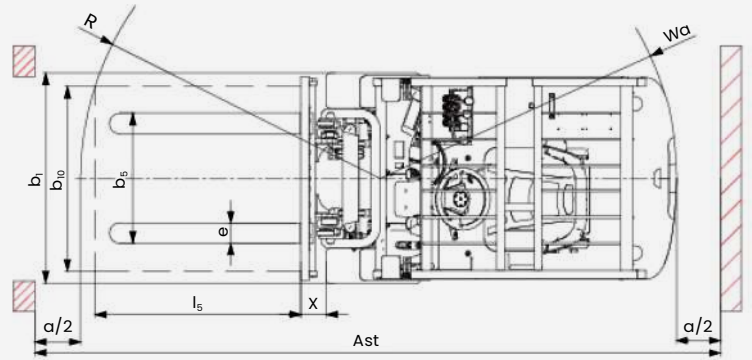

**RE13TW-SH**      **RE15TW-SH**

**Note:** The vertical axis stands for load capacity and the horizontal axis stands for load center which is calculated from the front surface of the forks to the gravity of the standard load. The standard load means a cubic with 1000mm edge length. When mast is tilted forward, using non-standard forks or loading large goods, the load capacity will be reduced. The load capacity of standard mast at different load center can be known from this load chart.

**BATTERY CHARGER**

Battery Voltage/Capacity	48V/315	48V/345	48V/360	48V/375
RE13TW-SH	●	○	○	○
RE15TW-SH	-	-	●	○
Charger	D48V50A-L160GB38			

**LITHIUM BATTERY CHARGER**

Brand	BOMAC - Type 1			BOMAC - Type 2			
	202	280	404	228	302	346	456
Battery Voltage/Capacity							
RE13TW-SH	○	○	○	●	○	○	○
RE15TW-SH	○	○	○	●	○	○	○
Lithium battery which heats itself automatically at low temperatures					●		
Charger	D48V200ALi-123, D48V200ALi-423						

Note: ● Standard, ○ Optional

**WIDE VIEW MAST**

Mast Model	Mast Lifting Height mm	Load Capacity (Load Center 500mm)		Mast Overall Height (Fork to the Ground)	Service Weight		Mast Tilting Angle (°) $\alpha/\beta$
		RE13TW-SH	RE15TW-SH	RE13TW-SH	RE13TW-SH	RE15TW-SH	
M200	2000	1300	1500	1525	2730	2865	3/6
M250	2500	1300	1500	1775	2760	2895	3/6
M300	3000	1300	1500	2025	2790	2925	3/6
M330	3300	1300	1500	2175	2815	2950	3/6
M350	3500	1250	1500	2275	2825	2960	3/6
M370	3700	1250	1500	2375	2835	2970	3/6
M400	4000	1250	1450	2575	2875	3010	3/6
M425	4250	1250	1350	2700	2885	3020	3/6
M450	4500	1250	1250	2825	2905	3040	3/6
M500	5000	1150	1150	3075	2930	3065	3/3

**WIDE VIEW FULL FREE 2-STAGE MAST**

Mast Model	Mast Lifting Height mm	Load Capacity (Load Center 500mm)		Mast Overall Height (Fork to the Ground)	Free Lifting Height (With Backrest)	Service Weight		Mast Tilting Angle (°) $\alpha/\beta$
		RE13TW-SH	RE15TW-SH	RE13TW-SH	RE15TW-SH	RE13TW-SH	RE15TW-SH	
ZM200	2000	1300	1500	1525	510	2800	2935	3/6
ZM250	2500	1300	1500	1775	760	2830	2965	3/6
ZM300	3000	1300	1500	2025	1010	2860	2995	3/6
ZM330	3300	1300	1500	2175	1160	2880	3015	3/6
ZM350	3500	1250	1500	2275	1260	2890	3025	3/6
ZM370	3700	1250	1500	2375	1360	2900	3035	3/6
ZM400	4000	1250	1450	2575	1560	2940	3075	3/6

**WIDE VIEW FULL FREE 3-STAGE MAST**

Mast Model	Mast Lifting Height mm	Load Capacity (Load Center 500mm)		Mast Overall Height (Fork to the Ground)	Free Lifting Height (With Backrest)	Service Weight		Mast Tilting Angle (°) $\alpha/\beta$
		RE13TW-SH	RE15TW-SH	RE13TW-SH	RE15TW-SH	RE13TW-SH	RE15TW-SH	
ZSM360	3600	1250	1500	1790	781	2900	3045	3/6
ZSM400	4000	1250	1500	1925	916	2940	3075	3/6
ZSM435	4350	1250	1500	2040	1031	2960	3095	3/6
ZSM450	4500	1250	1450	2090	1081	2970	3105	3/6
ZSM470	4700	1200	1450	2160	1151	2995	3120	3/6
ZSM480	4800	1200	1450	2190	1181	2990	3125	3/6
ZSM500	5000	1150	1400	2290	1281	3000	3145	3/3
ZSM540	5400	1100	1350	2425	1416	3030	3175	3/3
ZSM600	6000	900	1000	2640	1631	3090	3235	3/3



**OPTIONAL CONFIGURATION**

Safety Class	Rear handle with horn for truck reversing	●
	OPS (travelling+lifting+tilting+attachment) (lowering is not included)	●
	Full set of OPS	○
	Safety switch for seat belt	○
	Hydraulic valve overload protection device	●
	Dry powder extinguisher (0.5kg)	○
	Dry powder extinguisher (2kg)	○
	Backward buzzer	●
	Reversing speaker (Chinese)	○
	Electronic upper buffering	○
	Wide- angle central rear view mirror	●
	Rearview mirror on two sides + Center wide angle rearview mirror	○
	Comfort Class	Semi-enclosure seat
Full suspension seat		○
Mechanical control valve		●
Fan		○
Cab/Windshields	Front windshield (with wiper/blow can)	○
	Rear windshield (with wiper/washer)	○
	Top windshield (without fan)	○
Lights Class	Without rear working light or rear blue light	●
	LED rear working lamp (one)	○
	Rear LED red/blue spot lamp	○
	Left, right and rear blue bar	○
	Fixed type LED flicker warning lamp	●
	Fixed type LED rotating warning lamp	○
	Fixed type LED rotating buzzer warning lamp	○
Others	BOMAC Type 2 battery	●
	BOMAC Type 1 battery	○
	Solid tyre	●
	Traceless solid tyre	○
	Metric screw thread	●
	American screw thread	○
	BOMAC package	●
	Neutral package	○
	Chinese plates	●
	English plates	○
	Customized plates	○
	Universal keys (four keys )	○
FICS standard type (domestic)	●	

Note: ● Standard, ○ Optional

**BOMAC**

エクストラ ワークス エクストラ ストロング