

LITHIUM BATTERY

FORKLIFT TRUCK

EXTRA WORK, EXTRA STRONG

BOMAC
エクストラ ワークス エクストラ ストロング



MORE
SAFETY



HIGH
PERFORMANCE



ENERGY
SAVING



RE15/18/20/25/30/35/38

LIION

L2H4
SERIES

After more than 30 years of development, BOMAC has grown into a large company and a world-class forklift exporter and has been widely used in The World.

BOMAC

エクストラ ワークス エクストラ ストロング



LBH4 SERIES LITHIUM-ION BATTERY FORKLIFT TRUCK

Provides a combination of strength, mobility and efficiency that makes it an effective solution for a wide range of freight and lifting needs in a variety of industrial environments.

COMFORT AND ENERGY SAVING

The user experience is fully considered and the superior operating space design provides high driving comfort.

Wide view mast design,
wide front view



The big handle and the
superspacious cab design
are suitable for people of
different heights.

Steering wheel start steering
(optional)

P.E.S three speed regulation

P — POWERFUL
E — ECONOMICS
S — ENERGY SAVING

Multi gear performance
mode can be freely
selected according to
actual working conditions.

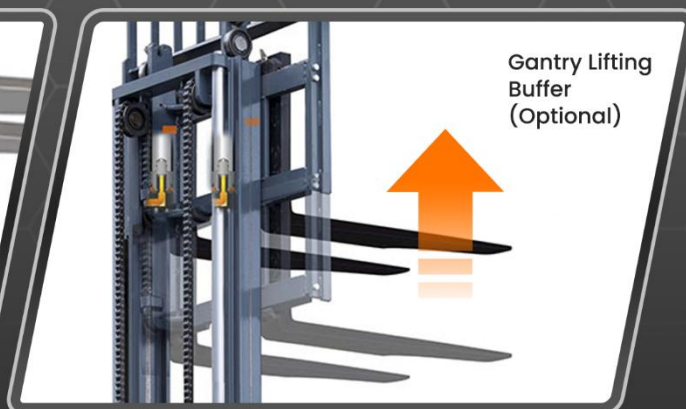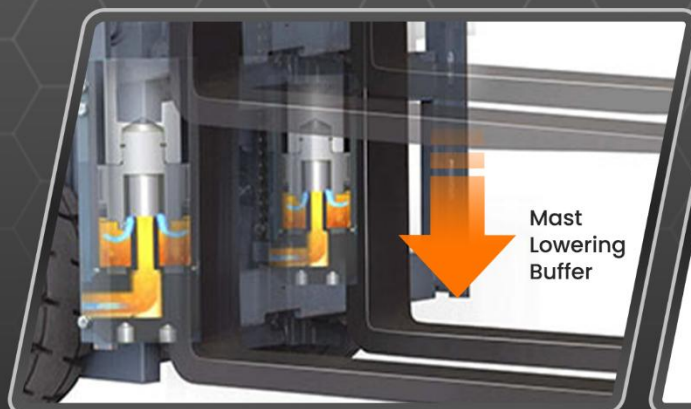

BOMAC LITHIUM-ION BATTERY FORKLIFT TRUCK

Provides a combination of strength, mobility and efficiency that makes it an effective solution for a wide range of freight and lifting needs in a variety of industrial environments.

COMFORT AND ENERGY SAVING

The user experience is fully considered and the superior operating space design provides high driving comfort.

The whole truck is equipped with LED lighting system as standard, with high brightness, long service life and more energy saving

Reversing horn handle (S optional, M standard)



EXTRA WORK, EXTRA STRONG




Right set operating valve stem offers good operation comfort.

Intelligent color screen instrument offers more friendly human-computer interaction.



Graphical interface design / fault display / integrated handheld unit function / optional integrated vehicle networking function.

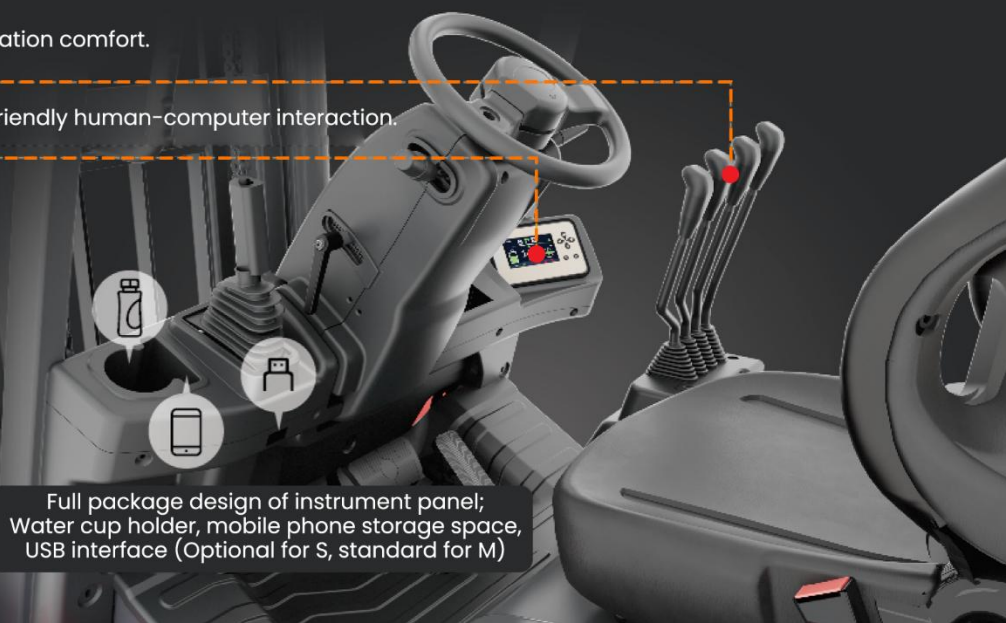

Full package design of instrument panel; Water cup holder, mobile phone storage space, USB interface (Optional for S, standard for M)

STABLE AND RELIABLE

BOMAC
エクストラー ワークス エクストラー ストロング

CAE analysis, component bench test and whole truck strengthening test are used to ensure reliability.

RELIABLE COMPONENT



STEERING AXLE:

Cast axle body, tapered roller bearing



DRIVE AXLE:

integral brake drum, integral cast axle housing, half shaft oil seal design, high-precision gear with large coincidence

MAST:

Borrowing the main components of mature mast of internal combustion forklift truck.

Sheet metal stamping side cover

All metal anti-skid pedal



**HIGH
PERFORMANCE**





STABLE AND RELIABLE

BOMAC
エクストラ ワークス エクストラ ストロング

CAE analysis, component bench test and whole truck strengthening test are used to ensure reliability.

GOOD LATERAL STABILITY OF THE WHOLE TRUCK & GUARANTEED SAFETY DURING OPERATION

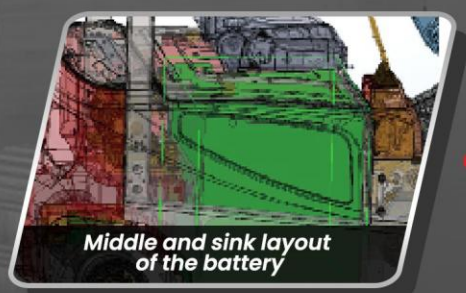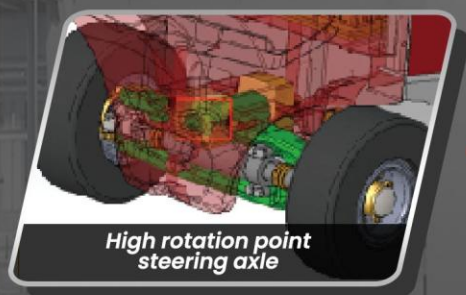

GOOD HEAT DISSIPATION



TEST VERIFICATION



Simulate the operation under 15min rainstorm, reach IPx4 protection grade, and meet the needs of outdoor operation.



The whole truck can run continuously after 6 hours of alternating operation in the -20°C cold storage and 12 hours of parking in the cold storage.



The vibration frequency of the whole truck is tested to optimize and improve the operating comfort.



800 hour strengthening of the whole truck (including climbing, rain, bumpy road, etc.).

INTELLIGENT SECURITY

BOMAC
エクストラ ワークス エクストラ ストロング

Intelligent control and protection improve the safety of drivers.

- ▶ Dualcore controller .
- ▶ OPS protection.
(standard driving OPS / optional hydraulic OPS).
- ▶ Hydraulic burst protection, forward tilting self-locking protection.
- ▶ Electrical multiple protection.
(short circuit protection, overheat protection, low power protection, sequence protection).
- ▶ Parking safety reminder.
- ▶ Reminder through slow sliding on ramp.
- ▶ Turning automatic deceleration (optional).





MORE SAFETY



«**EXTRA WORK,
EXTRA STRONG**»

Turning automatic deceleration

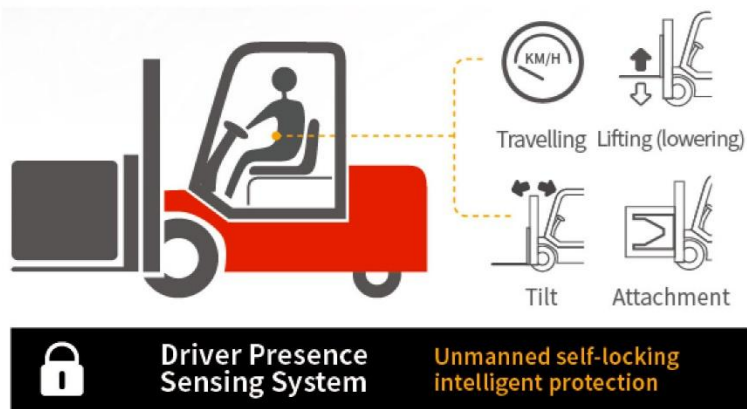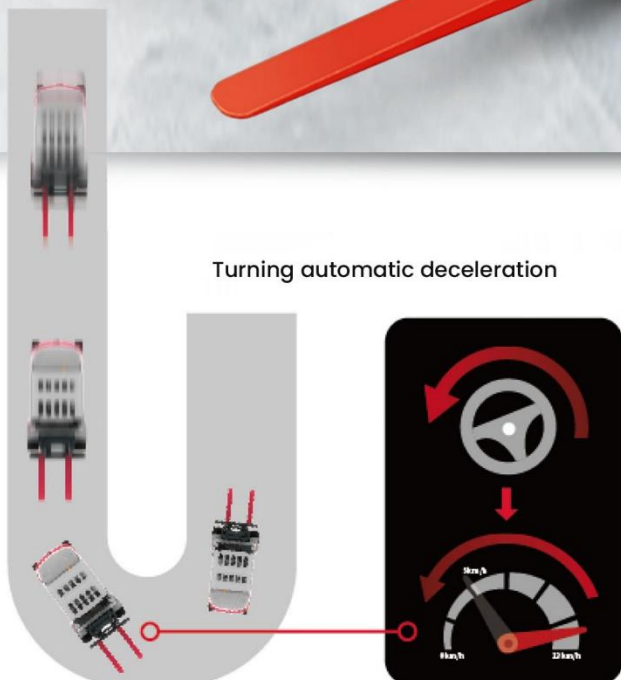

CONVENIENT MAINTENANCE

More convenient maintenance operation improves the maintenance efficiency of after-sale services.

- ▶ Flexible battery charging mode (can be charged with the truck or replaced)
- ▶ Pump, pump motor, controller and other main electrical components are located on the counterweight, which is convenient for maintenance.
- ▶ Friendly interface.

BOMAC
エクストラ ワークス エクストラ ストロング



**ENERGY
SAVING**



BOMAC smart fleet management system (Domestic basic edition)

Vehicle positioning

Statistical form

Remote diagnosis

Vehicle management

Remote monitoring


Identification recognition
(optional)

Maintenance reminder

Weight management
(optional)

Battery management

Collision management
(optional)

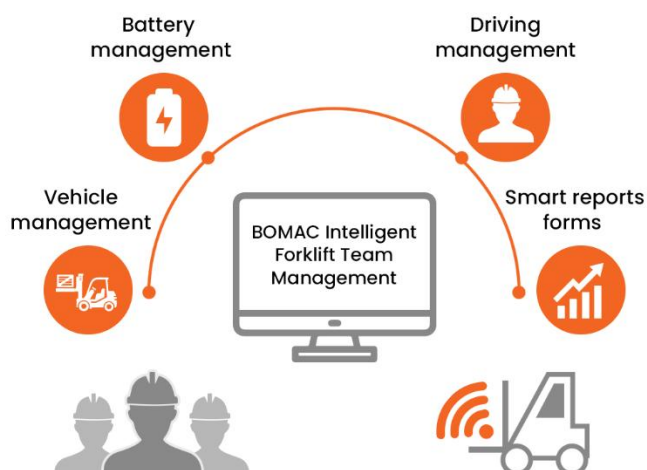

MANUFACTURER AND TECHNICAL DATA (TABULATION 1)

CHARACTERISTIC

Manufacturer			BOMAC				
Model			RE15	RE18	RE15	RE18	RE20
Configuration Number			MA3LBH4		SA7LBH4		SA7XLBH4
Rated Capacity	Q	kg	1500	1800	1500		
Load center distance	c	mm			500		
Power mode			Lithium Battery				
Driving mode			Seated				
Front overhang	x	mm	409		409		414
Wheelbase	y	mm	1475		1475		

WEIGHT

Total weight (with/without battery)		Kg	2855/2675	2970/2790	2835/2672	2950/2787	3100/2920
Axle load (laden, front/rear)		Kg	3719/636	4203/567	3711/624	4196/555	4547/553
Axle load (unladen, front/rear)		kg	1294/1561	1293/1677	1287/1548	1286/1664	1308/1792

TYRES

Tyre type			Pneumatic tyre		Pneumatic tyre		
Tyre size, front			6.50-10-10PR		6.50-10-10PR		6.50-10-12PR
Tyre size, rear			16x 6-8-10PR		16X6-8-10PR		
Wheels, number front/rear (x=driven wheels)			2/2		2/2		
Tread, front	b10	mm	934		934		
Tread, rear	b11	mm	920		920		

DIMENSIONS

Mast tilt angle (forward/backward)	α/β	°	6/8		6/8		
Height (mast lowered)	H1	mm	1995		1995		
Free lifting height	H2	mm	155		155		
Lifting height (standard)	H3	mm	3000		3000		
Max. height, extended (with backrest)	H4	mm	4014		4014		
Height of overhead guard	H6	mm	2130		2130		
Seat height relating to SIP (to ground)	H7	mm	1125		1125		
Towing coupling height	H10	mm	250		250		
Overall length (with fork)	l1	mm	3120		3120		3125
Overall length (without fork)	l2	mm	2200		220		2205
Overall width	B1	mm	1120		120		
Fork size: thickness x width x length			2A		2A		
Fork carriage, according to ISO2328	s/e/l	mm	35x 100x920		3X100X920		40X100X920
Distance across fork-arms, Max./Min.	B5	mm	960/200		960/200		
Ground clearance (at mast)	M1	mm	100		100		
Ground clearance (center of wheelbase)	M2	mm	95		95		
Right angle stacking aisle width for pallet 1000 x 1200mm crossways	Ast	mm	3575		3575		3580
Right angle stacking aisle width for pallet 800 x1200mm lengthways	Ast	mm	3770		3770		3775
Min. Outside turning radius	Wa	mm	1920		1920		

PERFORMANCE DATA

Travel speed (laden/unladen)		Km/h	14.5/15		12/13		
Lift speed (laden/unladen)		m/s	0.320/0.440	0.290/0.440	0.290/0.400	0.270/0.400	0.260/0.400
Lowering speed (laden/unladen)		m/s	0.400/0.400		0.400/0.400		
Max. drawbar pull (laden)		N	10200/900	10200/9800	10200/9700	10200/9800	1100/10700
Max. gradeability (laden/unladen)		%	17/27	15/26	15/23	15/22	15/25
Acceleration time (10 m) (laden/unladen)		s	55/5.2	5.6/5.3	6.0/5.7	6.1/5.8	5.6/5.2

BATTERY

Battery voltage/Capacity		V/Ah	80/150		80/125		80/150
Battery weight		kg	180		163		180

MOTOR AND CONTROLLER

Driving motor powering (S2-60min)		kW	8	8
Lifting motor powering (S3-15%)		kW	10.6	10.6
Driving motor controlling mode			MOSFET/AC	
Lifting motor controlling mode			MOSFET/AC	

ADDITION DATA

Service brake/Parking brake			Hydraulic/Mechanical				
Operating pressure for attachments		Mpa	16				

MANUFACTURER AND TECHNICAL DATA (TABULATION 2)

CHARACTERISTIC

Manufacturer			BOMAC			
Model			RE20	RE25	RE20	RE25
Configuration Number			MA3LBH4		SA7LBH4	
Rated Capacity	Q	kg	2000	2500	2000	2500
Load center distance	c	mm	500			
Power mode			Lithium Battery			
Driving mode			Seated			
Front overhang	x	mm	460			
Wheelbase	y	mm	1660			

WEIGHT

Total weight (with/without battery)		Kg	3585/3395	3925/3735	3540/3375	3880/3715
Axle load (laden, front/rear)		Kg	4970/615	5790/635	4940/600	5760/620
Axle load (unladen, front/rear)		kg	1750/1835	1780/2145	1720/1820	1750/2130

TYRES

Tyre type			Pneumatic tyre			
Tyre size, front			7.00-12-14PR			
Tyre size, rear			18x 7-8-14PR			
Wheels, number front/rear (x=driven wheels)			2/2			
Tread, front	b10	mm	970			
Tread, rear	b11	mm	960			

DIMENSIONS

Mast tilt angle (forward/backward)	α/β	°	6/10			
Height (mast lowered)	H1	mm	2000			
Free lifting height	H2	mm	165			
Lifting height (standard)	H3	mm	3000			
Max. height, extended (with backrest)	H4	mm	4320			
Height of overhead guard	H6	mm	2170			
Seat height relating to SIP (to ground)	H7	mm	1154			
Towing coupling height	H10	mm	300			
Overall length (with fork)	I1	mm	3354	3504	3354	3504
Overall length (without fork)	I2	mm	2434			
Overall width	B1	mm	1180			
Fork size: thickness x width x length			2A			
Fork carriage, according to ISO2328	s/e/l	mm	40*122*920	40*122*1070	40*122*920	40*122*1070
Distance across fork-arms, Max./Min.	B5	mm	1030/250			
Ground clearance (at mast)	M1	mm	100			
Ground clearance (center of wheelbase)	M2	mm	125			
Right angle stacking aisle width for pallet 1000 x1200mm crossways	Ast	mm	3753			
Right angle stacking aisle width for pallet 800 x1200mm lengthways	Ast	mm	3953			
Min. Outside turning radius	Wa	mm	2140			

PERFORMANCE DATA

Travel speed (laden/unladen)		Km/h	14.5/15		12/13	
Lift speed (laden/unladen)		m/s	0.320/0.440	0.290/0.440	0.290/0.440	0.290/0.440
Lowering speed (laden/unladen)		m/s	0.360/0.460			
Max. drawbar pull (laden)		N	13600/1300	14000/13300	13600/13000	14000/13300
Max. gradeability (laden/unladen)		%	17/26	15/25	15/25	15/25
Acceleration time (10 m) (laden/unladen)		s	5.9/5.0	6.1/5.0	6.0/5.0	6.2/5.3

BATTERY


Battery voltage/Capacity		V/Ah	80/202		80/150	
Battery weight		kg	190		165	

MOTOR AND CONTROLLER


Driving motor powering (S2-60min)		kW	11			
Lifting motor powering (S3-15%)		kW	12			
Driving motor controlling mode			MOFET/AC			
Lifting motor controlling mode			MOFET/AC			

ADDITION DATA


Service brake/Parking brake			Hydraulic/Mechanical			
Operating pressure for attachments		Mpa	16			

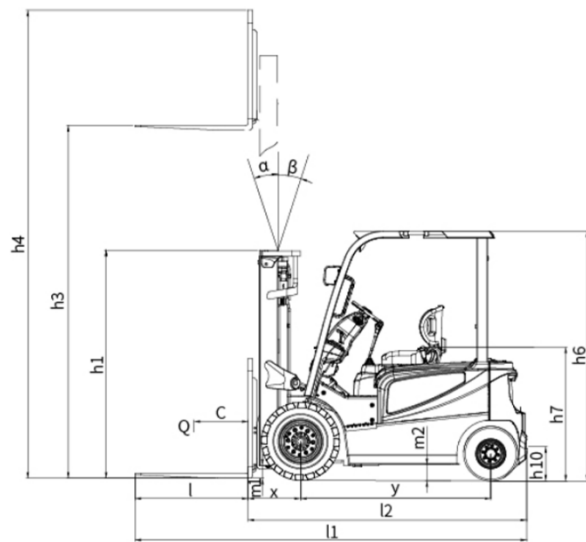

Ast: Right angle stacking aisle width
a: Clearance 200mm

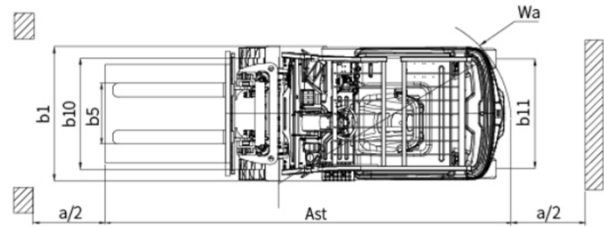

LOAD CURVE

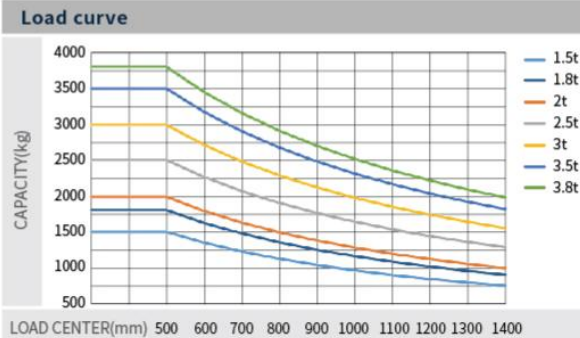

Note:

The vertical axis stands for load capacity and the horizontal axis stands for load center which is calculated from the front surface of the forks to the gravity of the standard load, the standard load means a cubic with 1000mm edge length. When mast is tilted forward, using non-standard forks or loading large goods, the load capacity will be reduced. The load capacity of standard mast at different load center can be known from this load chart.

LITHIUM BATTERY ADVANTAGES



Seawater immersion test



Extrusion test



Heating test




Temperature cycling test



Temperature cycling test



Drop test

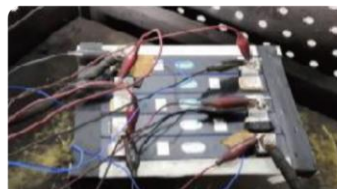

Overcharge test



Short circuit test

- The truck selects mature and economical square iron phosphate lithium battery core and module used by large numbers of commercial vehicles;
- The module adopts aluminium alloy plate frame, which is firm, light in weight and has good heat dissipation effect;
- Fast charging: fast charging makes truck gapless operation possible, and it can be filled in 2 hours;
- High efficiency and safety: The charging and discharging efficiency is up to 98%, and temperature of thermal runaway is over 600 °C;
- Low temperature adaptability: Standard configuration of heating function ensures normal operation of low temperature environment;
- Long service life: the normal charging and discharging cycles is more than 3000 times or 5 years, and capacity retention rate is more than 75%;
- Maintenance free: the battery does not need manual maintenance and does not need to add distilled water electrolyte;
- Green and clean: no pollution and zero emission.

MANUFACTURER AND TECHNICAL DATA (TABULATION 2)

CHARACTERISTIC

Manufacturer			BOMAC				
Model			RE30	RE35	RE30	RE35	RE38
Configuration Number			MA3LBH4		SA7LBH4		
Rated Capacity	Q	kg	3000	3500	3000	3500	3800
Load center distance	c	mm	500				
Power mode			Lithium Battery				
Driving mode			Seated				
Front overhang	x	mm	477	482	477	482	482
Wheelbase	y	mm	1750				1780

WEIGHT

Total weight (with/without battery)		Kg	4550/4310	4860/4620	4500/4290	4810/4600	5240/5000
Axle load (laden, front/rear)		Kg	6750/800	7630/730	6710/790	7590/720	8150/890
Axle load (unladen, front/rear)		kg	2050/2500	2110/2750	2010/2490	2070/2740	2220/3020

TYRES

Tyre type			Front Pneumatic Tyre / Rear Solid Tyre				
Tyre size, front			28*9-15-14PR				28*12.5-15-24PR
Tyre size, rear			18*7-8				200/50-10
Wheels, number front/rear (x=driven wheels)			2/2				
Tread, front	b10	mm	1000				1080
Tread, rear	b11	mm	970				970

DIMENSIONS

Mast tilt angle (forward/backward)	α/β	°	6/10				
Height (mast lowered)	H1	mm	2070	2120	2070	2120	2180
Free lifting height	H2	mm	155				160
Lifting height (standard)	H3	mm	3000				
Max. height, extended (with backrest)	H4	mm	4217				
Height of overhead guard	H6	mm	2180				2185
Seat height relating to SIP (to ground)	H7	mm	1164				
Towing coupling height	H10	mm	310				
Overall length (with fork)	I1	mm	3637	3624	3637	3642	3682
Overall length (without fork)	I2	mm	2567	2572	2567	2572	2612
Overall width	B1	mm	1260				1392
Fork size: thickness x width x length			3A				
Fork carriage, according to ISO2328	s/e/l	mm	45*125*1070	50*125*1070	45*125*1070	50*125*1070	
Distance across fork-arms, Max./Min.	B5	mm	1060/250				
Ground clearance (at mast)	M1	mm	110				125
Ground clearance (center of wheelbase)	M2	mm	135				140
Right angle stacking aisle width for pallet 1000 x1200mm crossways	Ast	mm	3912	3917	3912	3917	3952
Right angle stacking aisle width for pallet 800 x1200mm lengthways	Ast	mm	4115	4117	4115	4117	4152
Min. Outside turning radius	Wa	mm	2235				2270

PERFORMANCE DATA

Travel speed (laden/unladen)		Km/h	14.5/15		12/13		
Lift speed (laden/unladen)		m/s	0.320/0.440	0.290/0.440	0.290/0.400	0.270/0.400	0.270/0.400
Lowering speed (laden/unladen)		m/s	0.400/0.400				
Max. drawbar pull (laden)		N	16300/15800	17000/16600	16300/16000	16900/15900	16800/16200
Max. gradeability (laden/unladen)		%	17/26	15/23	15/25	15/22	15/20
Acceleration time (10 m) (laden/unladen)		s	5.7/5.1	6.1/5.2	5.8/5.3	6.3/5.4	6.2/5.2

BATTERY

Battery voltage/Capacity		V/Ah	80/250		80/202		80/250
Battery weight		kg	240		210		240

MOTOR AND CONTROLLER

Driving motor powering (S2-60min)		kW	15				
Lifting motor powering (S3-15%)		kW	16				
Driving motor controlling mode			MOSFET/AC				
Lifting motor controlling mode			MOSFET/AC				

ADDITION DATA

Service brake/Parking brake			Hydraulic/Mechanical				
Operating pressure for attachments		Mpa	16				

LITHIUM BATTERY																			
Battery Brand	H Series							C Series											
Voltage/Capacity	80V/125Ah	80V/150Ah	80V/202Ah	80V/250Ah	80V/280Ah	80V/404Ah	80V/560Ah	80V/125Ah	80V/150Ah	80V/173Ah	80V/202Ah	80V/228Ah	80V/271Ah	80V/302Ah	80V/346Ah	80V/404Ah	80V/456Ah	80V/542Ah	80V/604Ah
1.5-1.8t S	●	○	○	○	○	-	-	○	○	○	○	○	○	○	-	-	-	-	-
1.5-1.8t M	-	●	○	○	○	-	-	-	○	○	○	○	○	○	-	-	-	-	-
2t (X) S	-	●	○	○	○	-	-	-	○	○	○	○	○	○	-	-	-	-	-
2-2.5t S	-	●	○	○	○	○	-	-	○	○	○	○	○	○	-	-	-	-	-
2-2.5t m	-	-	●	○	○	○	-	-	-	-	○	○	○	○	○	○	-	-	-
3-3.5t S	-	-	●	○	○	○	○	-	-	-	○	○	○	○	○	○	○	○	○
3-3.5t M	-	-	-	●	○	○	○	-	-	-	-	-	○	○	○	○	○	○	○
3.8t S	-	-	-	●	○	○	○	-	-	-	-	-	○	○	○	○	○	○	○
Heating at low Temperature	●																		

Note: “●” Standard; “○” Optional; “-” Non-configurable;

CHARGER		
Model		D80V100ALI-438
Wiring type		Three-phase four-wiring type
Power of charger	KVA	10
Air switch model of upper-level power	A	32
Input voltage range	Vac	380±15%
Input current	A	<20A
Output current	A	5~100
Protection level		For indoor use
Working ambient temperature	°C	-20~+45
Plugs and sockets		REMA320
Charger	Full charging time=required charging capacity/charging current+0.2h For example: the battery capacity is 80V/250Ah, and the discharging state is alarmed by instrument, The charger is 100A, thus the full charging time is 250*0.9/100+0.2=2.45h	



- ▶ Fast Charging
- ▶ Low Operating Costs
- ▶ Long Battery Life
- ▶ Eco-Friendly Design



««« EXTRA WORK,
EXTRA STRONG »»»

1.5T/1.8T/2T (E) MAST PARAMETERS

Mast type	Mast model	Max. lifting height (mm)	Load capacity (load center 500mm) (kg)			Height (mast lowered) (mm)		Free lift (with backrest) (mm)		Service weight (kg)					Mast tilt angle α/β (°)	
			1.5t	1.8t	2t (E)	15-1.8t	2t (E)	1.5-1.8t	2t (E)	1.5t-s	1.5t-M	1.8t-S	1.8t-M	2t(E)	1.5-1.8t	2t (E)
2-Stage standard Mast	M200	2000	1500	1800	2000	1495	1495	155	155	2771	2791	2905	2905	3036	6/8	6/8
	M250	2500	1500	1800	2000	1745	1745	155	155	2803	2823	2938	2938	3058	6/8	6/8
	M300	3000	1500	1800	2000	1995	1995	155	155	2835	2855	2970	2970	3100	6/8	6/8
	M330	3300	1500	1800	2000	2145	2145	155	155	2854	2874	2989	2989	3119	6/8	6/8
	M350	3500	1500	1800	2000	2245	2245	155	155	2867	2887	3002	3002	3132	6/8	6/6
	M370	3700	1500	1800	2000	2345	2345	155	155	2880	2900	3015	3015	3145	6/6	6/6
	M400	4000	1500	1800	2000	2545	2545	155	155	2928	2948	3063	3063	3193	6/6	6/6
	M425	4250	1500	1800	1950	2670	2670	155	155	2945	2965	3080	3080	3210	6/6	6/6
	M450	4500	1450	1650 *1750	1750	2795	2795	155	155	2961	2981	3096	3096	3226	6/6 *6/8	6/6
	M500	5000	1200 *1300	1400 *1600	1500	3045	3045	155	155	2993	3013	3128	3128	3258	6/6 *6/6	6/6
	M550	5500	1000 *1250	1100 *1550	1300	3345	3345	155	155	3055	3075	3190	3190	3320	3/6 *3/6	3/6
	M600	6000	800 *1200	900 *1450	900	3595	3595	155	155	3087	3107	2222	3222	3352	3/6 *3/6	3/6
2-Stage full free mast	M200	2000	1500	1800	2000	1495	1495	485	485	2820	2840	2935	2955	3085	6/8	6/8
	ZM250	2500	1500	1800	2000	1745	1745	135	135	2852	2872	2967	2987	3117	6/8	6/8
	ZM300	3000	1500	1800	2000	1995	1995	985	985	2886	2906	3001	3021	3151	6/8	6/8
	ZM330	3300	1500	1800	2000	2145	2145	1135	1135	2908	2928	3023	3042	3173	6/8	6/8
	ZM350	3500	1500	1800	2000	2245	2245	1235	1235	2923	2943	3038	3058	3188	6/8	6/8
	ZM370	3700	1500	1800	2000	2345	2345	1335	1335	2935	2955	3050	3070	3200	6/6	6/6
	ZM400	4000	1500	1800	2000	2545	2545	1535	1535	2983	3002	3098	3118	3248	6/6	6/6
	ZM425	4250	1500	1800	-	2670	-	1660	-	3002	3022	3117	3137	-	6/6	-
	ZM450	4500	1450	1650 *1750	-	2795	-	1785	-	3021	3041	3136	3156	-	6/6 *6/8	-
	ZM500	5000	1200 *1300	1400 *1600	-	3045	-	2035	-	3055	3075	3170	3190	-	6/6 *6/6	-
	ZM550	5500	1000 *1250	1100 *1550	-	3345	-	2335	-	3116	3136	3231	3251	-	3/6 *3/6	-
	ZM600	6000	800 *1200	900 *1450	-	3595	-	2585	-	3150	3170	3265	3285	-	3/6 *3/6	-
3-Stage full free mast	M200	3600	1500	1800	2000	1790	1790	785	785	2934	2954	3049	3069	3199	6/6	6/6
	ZSM400	4000	1500	1800	2000	1925	1925	920	920	2958	2978	3073	3093	3223	6/6	6/6
	ZSM435	4350	1450 *1500	1700 *1800	1850	2040	2040	1035	1035	2983	3003	3098	3118	3248	6/6 *6/6	6/6
	ZSM450	4500	1450 *1500	1650 *1750	1750	2090	2090	1085	1085	2994	3014	3109	3129	3259	6/6 *6/6	6/6
	ZSM470	4700	1400 *1450	1600 *1650	1650	2160	2160	1155	1155	3010	3010	3125	3145	3275	6/6 *6/6	6/6
	ZSM480	4800	1350 *1400	1550 *1650	1650	2190	2190	1185	1185	3017	3037	3132	3152	3282	6/6 *6/6	6/6
	ZSM500	5000	1200 *1300	1400 *1600	1500	2290	2290	1285	1285	3038	3058	3153	3173	3303	6/6 *6/6	6/6
	ZSM540	5400	1000 *1250	1100 *1550	1300	2415	2415	1410	1410	3064	3084	3179	3199	3329	3/6 *3/6	3/6
	ZSM600	6000	800 *1200	900 *1450	900	2640	2640	1635	1635	3136	2855	3251	3271	3401	3/6 *3/6	3/6
	ZSM650	6500	*1100	*1250	-	2840	-	1835	-	3174	3194	3289	3305	-	3/3 *3/3	-
	ZSM700	7000	*900	*950	-	3025	-	2025	-	3212	3232	3327	3347	-	3/3 *3/3	-

Note: *Indicates the rated load capacity of the front wheel with twin tyres; 2t (E) indicates that the truck type is RE20- SA7XLBH4; When the front wheels of 1.5-1.8t are twin tyres (pneumatic tyres) and twin tyres (solid tyres), the service weight is increased by 58kg and 104kg respectively according to the table data.

2-stage full free mast: 1.5-2t(E): When there is no backrest, the free lifting height increases by 379mm.

3-stage full free mast: 1.5-2t(E): When there is no backrest, the free lifting height increases by 484mm.

2T/2.5T MAST PARAMETERS											
Mast type	Mast model	Max. lifting height (mm)	Load capacity (load center 500mm) (kg)		Height (mast lowered) (mm)	Free lift (with backrest) (mm)	Service weight (kg)				Mast tilt angle α/β (°)
			2t	2.5t			2t-S	2t-M	2.5t-S	2.5t-M	
2-Stage standard Mast	M200	2000	2000	2500	1500	150	3460	3505	3800	3845	6/10
	M250	2500	2000	2500	1750	150	3508	3553	3848	3893	6/10
	M300	3000	2000	2500	2000	150	3540	3585	3880	3925	6/10
	M330	3300	2000	2500	2150	150	3580	3625	3920	3965	6/10
	M350	3500	2000	2500	2250	150	3599	3644	3939	3984	6/10
	M370	3700	2000	2500	2350	150	3615	3660	3955	4000	6/6
	M400	4000	2000	2500	2550	150	3687	3732	4027	4072	6/6
	M425	4250	1950*2000	2450*2500	2675	150	3711	3756	4051	4096	6/6*6/10
	M450	4500	1900*1950	2300*2400	2800	150	3733	3778	4073	4118	6/6*6/10
	M500	5000	1800*1850	2100*2200	3050	150	3777	3822	4117	4162	6/6*6/6
	M550	5500	1450*1700	1500*2150	3350	150	3868	3913	4208	4253	3/6*3/6
	M600	6000	1050*1600	1150*1800	3600	150	3913	3958	4253	4298	3/6*3/6
2-Stage full free mast	ZM200	2000	2000	2500	1500	496	3727	3772	4067	4112	6/10
	ZM250	2500	2000	2500	1750	746	3793	3838	4133	4178	6/10
	ZM300	3000	2000	2500	2000	996	3860	3905	4200	4245	6/10
	ZM330	3300	2000	2500	2150	1146	3900	3945	4240	4285	6/10
	ZM350	3500	2000	2500	2250	1246	3927	3972	4267	4312	6/10
	ZM370	3700	2000	2500	2350	1346	3953	3998	4293	4338	6/6
	ZM400	4000	2000	2500	2550	1546	4044	4089	4384	4429	6/6
	ZM425	4250	1950*2000	2450*2500	2675	1671	4077	4122	4417	4462	6/6*6/10
	ZM450	4500	1900*1950	2300*2400	2800	1796	4110	4155	4450	4495	6/6*6/10
	ZM500	5000	1800*1850	2100*2200	3050	2046	4177	4222	4517	4562	6/6*6/6
	ZM550	5500	1450*1700	1500*2150	3350	2346	4294	4339	4634	4679	3/6*3/6
	ZM600	6000	1050*1600	1150*1800	3600	2596	4361	4406	4701	4746	3/6*3/6
3-Stage full free mast	ZSM360	3600	2000	2500	1800	796	3945	3990	4285	4330	6/6
	ZSM400	4000	2000	2500	1950	946	3978	4023	4318	4363	6/6
	ZSM435	4350	1900*2000	2400*2500	2050	1046	4012	4057	4352	4397	6/6*6/6
	ZSM450	4500	1850*1900	2300*2350	2100	1096	4025	4070	4365	4410	6/6*6/6
	ZSM470	4700	1800*1850	2200*2250	2165	1161	4042	4087	4382	4427	6/6*6/6
	ZSM480	4800	1850*1700	2200*2250	2210	1206	4052	4097	4392	4437	6/6*6/6
	ZSM500	5000	1800*1850	2100*2200	2300	1296	4078	4123	4418	4463	6/6*6/6
	ZSM540	5400	1450*1700	1500*2150	2400	1396	4112	4157	4452	4497	3/6*3/6
	ZSM600	6000	1000*1600	1100*1800	2600	1596	4209	4254	4549	4594	3/6*3/6
	ZSM650	6500	1450	*1650	2800	1796	4260	4305	4600	4645	3/6*3/6
	ZSM700	7000	1150	*1300	2975	1971	4332	4377	4672	4717	3/6*3/6

Note: *Indicates the rated load capacity of the front wheel with twin tyres; 2t (E) indicates that the truck type is RE20-SA7XLBH4; When the front wheels of 1.5-1.8t are twin tyres (pneumatic tyres) and twin tyres (solid tyres), the service weight is increased by 58kg and 104kg respectively according to the table data.

2-stage full free mast: 1.5-2t(E): When there is no backrest, the free lifting height increases by 379mm.

3-stage full free mast: 1.5-2t(E): When there is no backrest, the free lifting height increases by 484mm.

3T/3.5T/3.8T MAST PARAMETERS											
Mast type	Mast model	Max. Lifting height (mm)	Load capacity (Load center 500mm) (kg)			Height (Mast lowered) (mm)			Free lift (With backrest (mm)		
			3t	3.5t	3.8t	3t	3.5t	3.8t	3t	3.5t	3.8t
2-Stage standard Mast	M200	2000	3000	3500	3800	1570	1620	1680	155	160	160
	M250	2500	3000	3500	3800	1820	1870	1930	155	160	160
	M300	3000	3000	3500	3800	2070	2120	2180	155	160	160
	M330	3300	3000	3500	3800	2220	2270	2330	155	160	160
	M350	3500	3000	3300	3800	2320	2370	2430	155	160	160
	M370	3700	3000	3150	3800	2420	2470	2530	155	160	160
	M400	4000	2850	3150	3700	2620	2670	2730	155	160	160
	M425	4250	2750*2800	3050*3150	3550*3650	2745	2795	2855	155	160	160
	M450	4500	2600*2700	2800*3000	3400*3600	2870	2920	2980	155	160	160
	M500	5000	2200*2350	2450*2500	3000*3200	3120	3170	3230	155	160	160
	M550	5500	1950*2150	2300*2350	2700*3000	3420	3470	3530	155	160	160
	M600	6000	1300*1900	1450*2100	2200*2600	3670	3720	3780	155	160	160
2-Stage full free mast	ZM200	2000	3000	3500	3800	1570	1620	1680	340	443	503
	ZM250	2500	3000	3500	3800	1820	1870	1930	590	693	753
	ZM300	3000	3000	3500	3800	2070	2120	2180	840	943	1003
	ZM330	3300	3000	3500	3800	2220	2270	2330	990	1093	1153
	ZM350	3500	3000	3500	3800	2320	2370	2430	1090	1193	1253
	ZM370	3700	3000	3200	3800	2420	2470	2530	1190	1293	1353
	ZM400	4000	2850	3200	3700	2620	2670	2730	1390	1493	1553
	ZM425	4250	2650*2700	3050*3150	-	2745	2795	2855	1515	1618	-
	ZM450	4500	2500*2600	2850*3050	-	2870	2920	2980	1640	1743	-
	ZM500	5000	2100*2600	2350*2750	-	3120	3170	3230	1890	1993	-
	ZM550	5500	1950*2400	2200*2550	-	3420	3470	3530	2190	2293	-
	ZM600	6000	1300*2000	1350*2200	-	3670	3720	3780	2440	2543	-
3-Stage full free mast	ZM200	3600	2850	3250	3800	1870	1870	1930	640	640	693
	ZSMA00	4000	2750	3100	3700	2020	2020	2055	790	790	843
	ZSM435	4350	2550*2600	2950*3100	3500*3600	2120	2120	2180	890	890	943
	ZSM450	4500	2450*2600	2850*3000	3400*3600	2170	2170	2230	940	940	993
	ZSM470	4700	2400*2550	2650*2700	3100*3200	2230	2230	2295	1000	1000	1053
	ZSM480	4800	2350*2550	2550*2600	3100*3200	2270	2270	2330	1040	1040	1093
	ZSM500	5000	2100*2550	2350*2450	3000*3150	2370	2370	2430	1140	1140	1193
	ZSM540	5400	2550*1950	2200*2400	2700*3000	2470	2470	2555	1240	1240	1293
	ZSM600	6000	1250*2200	1300*2400	2200*2600	2670	2670	2780	1440	1440	1493
	ZSM650	6500	950*1900	1000*2200	-	2870	2870	-	1640	1640	-
	ZSM700	7000	*1800	*2000	-	3045	3045	-	1815	1815	-

Note:

*Indicates the rated load capacity of the front wheel with twin tyres; When the front wheels of 3-3.5t are twin tyres (pneumatic tyres) and twin tyres (solid tyres), the service weight is increased by 140kg and 208kg respectively according to the table data; When the front wheels of 3.8t are twin tyres (pneumatic tyres) and twin tyres (solid tyres), the service weight is increased by 103kg and 251kg respectively according to the table data.

2-stage full free mast:3t: When there is no backrest, the free lifting height increases by 477mm; 3.5t-3.8t: When there is no backrest, the free lifting height increases by 407mm.

3-stage full free mast:3t: When there is no backrest, the free lifting height increases by 427mm; 3.5-3.8t: When there is no backrest, the free lifting height increases by 407mm.

3T/3.5T/3.8T MAST PARAMETERS							
Mast type	Mast model	Service weight (kg)					Mast tilt angle α/β (°)
		3t-S	3t-M	3t-S	3t-M	3.5t-M	
2-Stage standard Mast	M200	4404	4454	4704	4754	5134	6/10
	M250	4452	4502	4757	4807	5187	6/10
	M300	4500	4550	4810	4860	5240	6/10
	M330	4529	4579	4842	4892	5272	6/10
	M350	4548	4598	4863	4913	5293	6/10
	M370	4567	4617	4884	4934	5314	6/6
	M400	4647	4697	4968	5018	5398	6/6
	M425	4671	4721	4994	5044	5424	6/6*6/10
	M450	4695	4745	5021	5071	5451	6/6*6/10
	M500	4743	4793	5074	5124	5504	6/6*6/6
	M550	4841	4891	5178	5228	5608	3/6*6/6
	M600	4889	4939	5231	5281	5661	3/6*6/6
2-Stage full free mast	ZM200	4432	4482	428	4778	5158	6/10
	ZM250	4482	4532	4781	4831	5211	6/10
	ZM300	4532	4582	4835	4885	5265	6/10
	ZM330	4564	4614	4868	4918	5298	6/10
	ZM350	4584	4634	4889	4939	5319	6/10
	ZM370	4604	4654	4910	4960	5340	6/6
	ZM400	4682	4732	4990	5040	5420	6/6
	ZM425	4708	4758	5017	5067	-	6/6*6/10
	ZM450	4736	4786	5046	5096	-	6/6*6/10
	ZM500	4790	4840	5102	5152	-	6/6*6/6
	ZM550	4889	4939	5205	5255	-	3/6*6/6
	ZM600	4942	4992	5261	5311	-	3/6*6/6
3-Stage full free mast	ZM200	4643	4693	4921	4971	5354	6/6
	ZSMA00	4684	4734	4962	5012	5395	6/6
	ZSM435	4713	4763	4991	5041	5424	6/6*6/6
	ZSM450	4738	4778	5006	5056	5439	6/6*6/6
	ZSM470	4746	4796	5024	5074	5457	6/6*6/6
	ZSM480	4156	4806	5034	5084	5467	6/6*6/6
	ZSM500	4783	4833	5061	5111	5494	6/6*6/6
	ZSM540	4813	4863	5091	5141	5524	3/6*3/6
	ZSM600	4917	4967	5103	5153	5628	3/6*3/6
	ZSM650	4972	5022	5250	5300	-	3/3*3/3
	ZSM700	5022	5072	5300	5350	-	3/3*3/3

Note:

*Indicates the rated load capacity of the front wheel with twin tyres; When the front wheels of 3-3.5t are twin tyres (pneumatic tyres) and twin tyres (solid tyres), the service weight is increased by 140kg and 208kg respectively according to the table data; When the front wheels of 3.8t are twin tyres (pneumatic tyres) and twin tyres (solid tyres), the service weight is increased by 103kg and 251kg respectively according to the table data.

2-stage full free mast:3t: When there is no backrest, the free lifting height increases by 477mm; 3.5t-3.8t: When there is no backrest, the free lifting height increases by 407mm.

3-stage full free mast:3t: When there is no backrest, the free lifting height increases by 427mm; 3.5-3.8t: When there is no backrest, the free lifting height increases by 407mm.

OPTIONAL ITEM		
	MODEL	S
Basic items	Pneumatic tyre*	●
	Solid tyre	○
	Single tyre (front wheel)	●
	Twin tyre (front wheel)**	○
	Two piece valve	●
	Three or four piece valve	○
	Basic type: 3M lifting height mast	●
	Other type and other height series mast***	○
	Standard series fork	●
	Non standard series forks and attachments	○
	Standard exterior color (blue grey + red)	●
	Other exterior colors (customized)	○
Safety items	Turning speed limit	○
	Reversing armrest with horn switch	○
	Overspeed 5km/h alarm	○
	Overspeed 8km /h alarm	○
	Overspeed 10km /h alarm	○
	Travelling + lifting + tilting + equipped with OPS function (without lowering)	●
	Full set of OPS functions	○
	Seat belt switch	○
	Multi way valve overload	●
	Dry powder fire extinguisher (0.5kg)	○
	Dry powder fire extinguisher (2kg)	○
	Carbon dioxide fire extinguisher (2kg)	○
	Reversing buzzer	●
	Reversing Chinese speaker	○
	No universal key	●
	With universal key	○
	Electronic lifting upper buffer	○
	Central wide-angle rearview mirror	●
	Both side rear-view mirrors + center wide-angle rear-view mirror	○
Comfort items	Reversing radar (4 probes)	○
	Reversing image (1 Camera + 4 radar probes)	○
	Semi enclosed seat	●
	Fully suspended seat	○
	Instrument panel with 1 USB interface (5V / 1A)	○
	Steering wheel starts steering	○
	Synchronous steering	○
	Steering wheel with handle ball	●
Cab /Windshield / Air conditioner / Heater	Steering wheel without handle ball	○
	Electric fan	○
	Panel mounted cab (including fan + wiper)	○
	Heater	○
	Single cooling air conditioner	○
	Single cooling air conditioner + heater	○
	Front windshield (including wiper)	○
	Rear windshield	○
Non standard overhead guard	Top windshield (excluding fan)	○
	50mm increased of overhead guard height	○
	50mm reduced of overhead guard height	○
Lights	Overhead guard (with protective net)	○
	LED rear work light (1)	○
	Rear LED red / Blue spotlight (1)	○
	Rear and lateral red / blue bar lights	○
	Fixed LED flashing warning light	○
	Fixed LED rotary warning lamp	○
Others	Fixed LED rotary buzzer warning light	○
	Metric thread	●
	Tilt cylinder jacket	○
	Steering cylinder jacket	○
	REMA 320 charging port	●
	Onboard charger	○
	FICS standard type	○

Note:

“ ● ” Standard; “ ○ ” Optional

Some non-standard options need to be customized. Please consult local sales personnel or product development technicians before purchasing.

*3-3.8t rear wheel is equipped with solid tyre as standard. **The small 2t truck is not equipped with twin tyres.

***There are restrictions on the type and height of small 2t and 3.8t mast. See the table of mast parameters for details.

BOMAC

エクストラ ワークス エクストラ ストロング

A grayscale photograph of a BOMAC forklift in a warehouse. The forklift is positioned in the lower half of the frame, facing forward. The background is filled with tall, stacked pallets of goods, creating a complex geometric pattern of lines and shadows. The lighting is dramatic, with strong highlights and deep shadows.

BOMAC

エクストラ ワークス エクストラ ストロング